

Installation Setup Guide for Debian

This guide explains the steps to set up and perform a file backup on Debian. The process remains the same for other Debian-based distributions like Ubuntu and Linux Mint.

Installer Type	Use For	Linux Distributions	Package Manager
SH Online Installer	Generic Installer for any Linux system	CentOS, Debian, Red Hat, Ubuntu, Rocky Linux	Shell script (bash)
TAR GZ Offline Installer	All Linux distributions, no internet required	CentOS, Debian, Red Hat, Ubuntu, Rocky Linux	Manual install
RPM Online Installer	RHEL-based distributions (CentOS, RHEL, Rocky Linux)	CentOS, RHEL, Rocky Linux	rpm , dnf , yum
DEB Online Installer	Debian-based distributions (Ubuntu, Debian)	Ubuntu, Debian	dpkg , apt

Step 1: Create Account & Download the Linux Client

Create a PRO UK account in your portal and then open the following link to access the Linux client download page: <https://uk.onlinedatastorageuk.co.uk/cbs/system/ShowDownload.do>

If you have a branded URL / product name or are using another storage region apart from the UK, then please contact us for any help in following the below steps.

Method 1: Installing via .deb Installer

a) Update System and Install Required Packages

Open the terminal and run:

```
sudo apt update && sudo apt install -y curl
```

b) Download the (.deb) Installer

<https://uk.onlinedatastorageuk.co.uk/cbs/system/ShowDownload.do>

 Linux / FreeBSD / Solaris

 [SH online installer](#)

 [TAR GZ offline installer](#)

 [RPM online installer](#)

 [DEB online installer](#) 

c) Install the .deb Package

Navigate to the directory where the .deb file is downloaded:

```
root@debian:~# ls
Desktop
Documents
Downloads
Music
'obm-debian-noarch-443-uk.onlinedatastorageuk.co.uk-https-433140.deb?dlName=obm-
linux-noarch-443-uk.onlinedatastorageuk.co.uk-https-433140.deb'
Pictures
Public
Templates
Videos
root@debian:~#
```

Run the installation command:

```
[ dpkg -i obm-linux-noarch-443-uk.onlinedatastorageuk.co.uk-https-433140.deb ]
```

```
root@debian:~# dpkg -i obm-debian-noarch-443-uk.onlinedatastorageuk.co.uk-https-
433140.deb\dlName=obm-linux-noarch-443-uk.onlinedatastorageuk.co.uk-https-4331
40.deb
```

This command will start installing

If there are missing dependencies, fix them by running:

```
[ sudo apt-get install -f ]
```

Method 2: Installing via .sh Installer


a) Update System and Install Required Packages

Open the terminal and run:

```
[ sudo apt update && sudo apt install -y bash ]
```

b) Download the (.sh) Installer

<https://uk.onlinedatastorageuk.co.uk/cbs/system/ShowDownload.do>

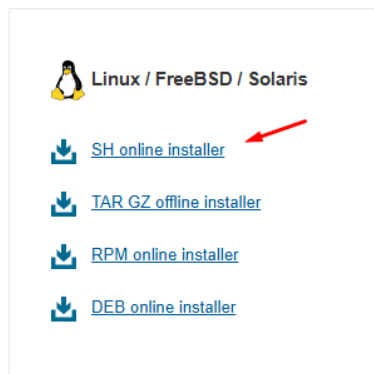

c) Grant Execution Permission

Navigate to the directory where the .sh file is downloaded:

```
root@debian:~/Desktop# ls
jre-std-linux-amd64.tar.gz
obm-linux-443-uk.onlinedatastorageuk.co.uk-https-433140.sh
```

Make the script executable:

```
[ chmod +x obm-linux-443-uk.onlinedatastorageuk.co.uk-https-433140.sh ]
```


d) Install the Backup Software

Run the installation script:


```
[ sudo bash obm-linux-443-uk.onlinedatastorageuk.co.uk-https-433140.sh ]
```

```
root@debian:~/Desktop# sudo bash obm-linux-443-uk.onlinedatastorag  
euk.co.uk-https-433140.sh
```

Step 2: After installation, search for BackupEverythingPro in your Menu

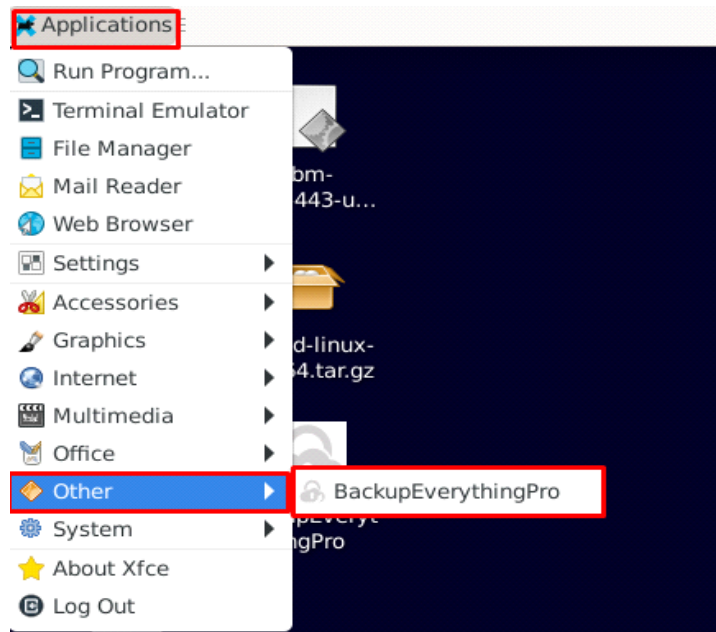


Open the client and log in using your credentials.



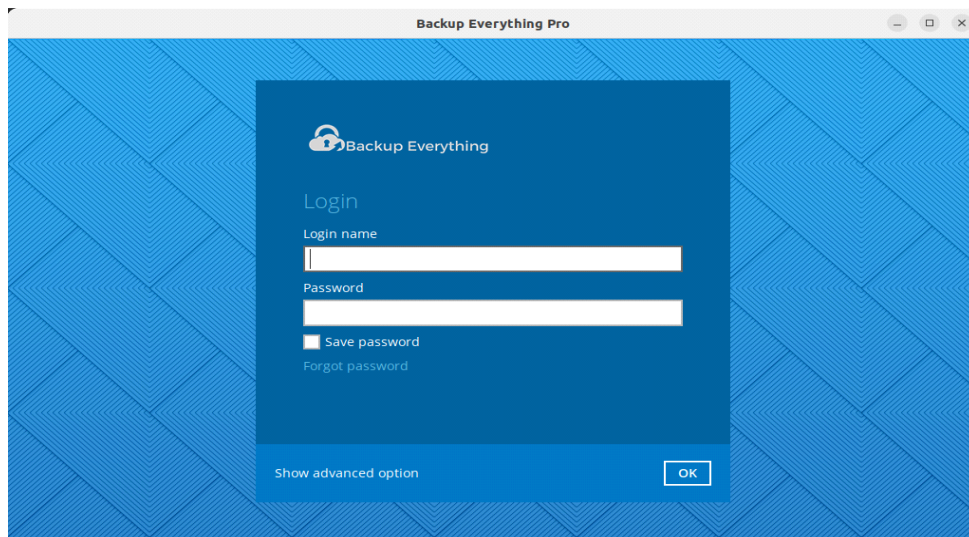


Step 3: Create your File Backup Set


Navigate to Backup Sets and click Create New Backup Set.

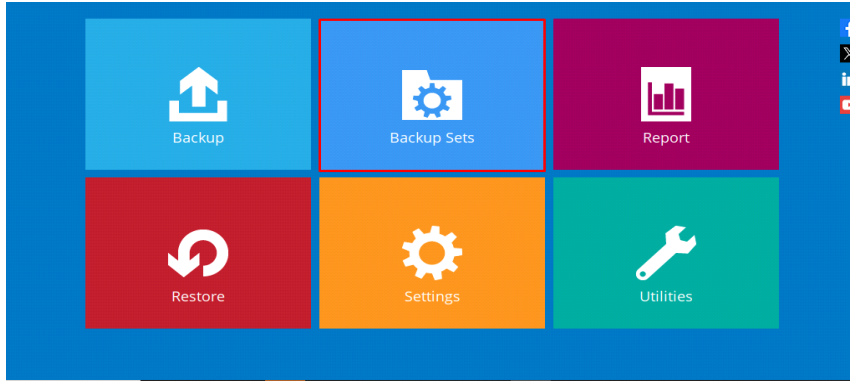


Enter a Backup Set Name and click Next.

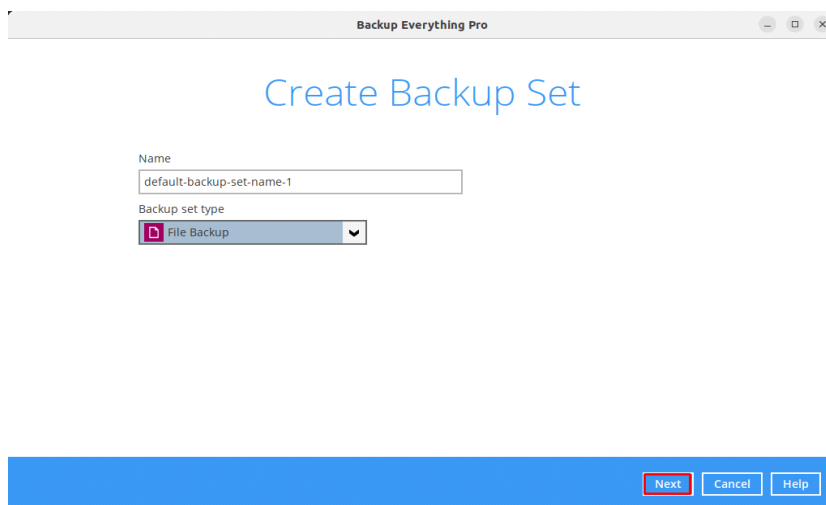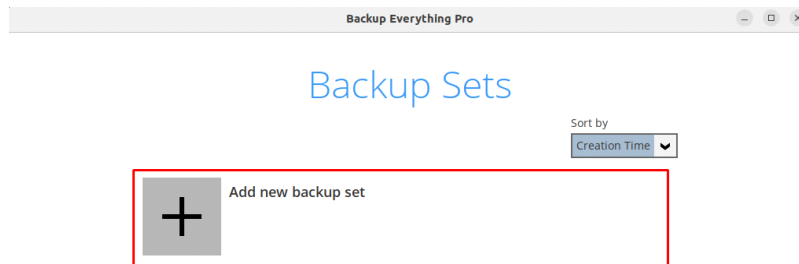

Step 4: Select Files to Backup

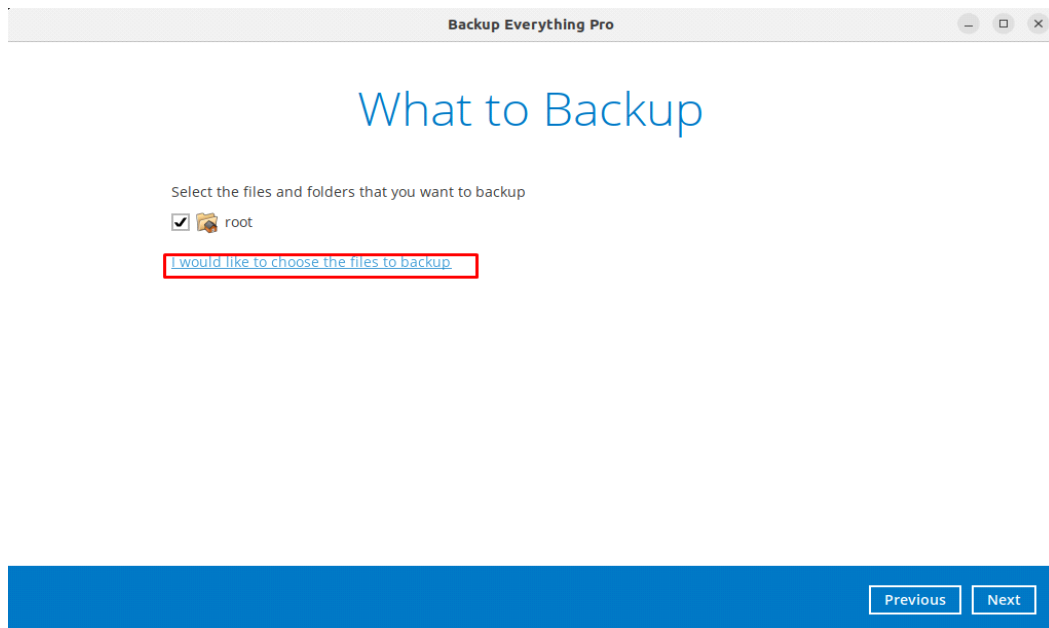


Choose the files or directories you want to include in the backup.

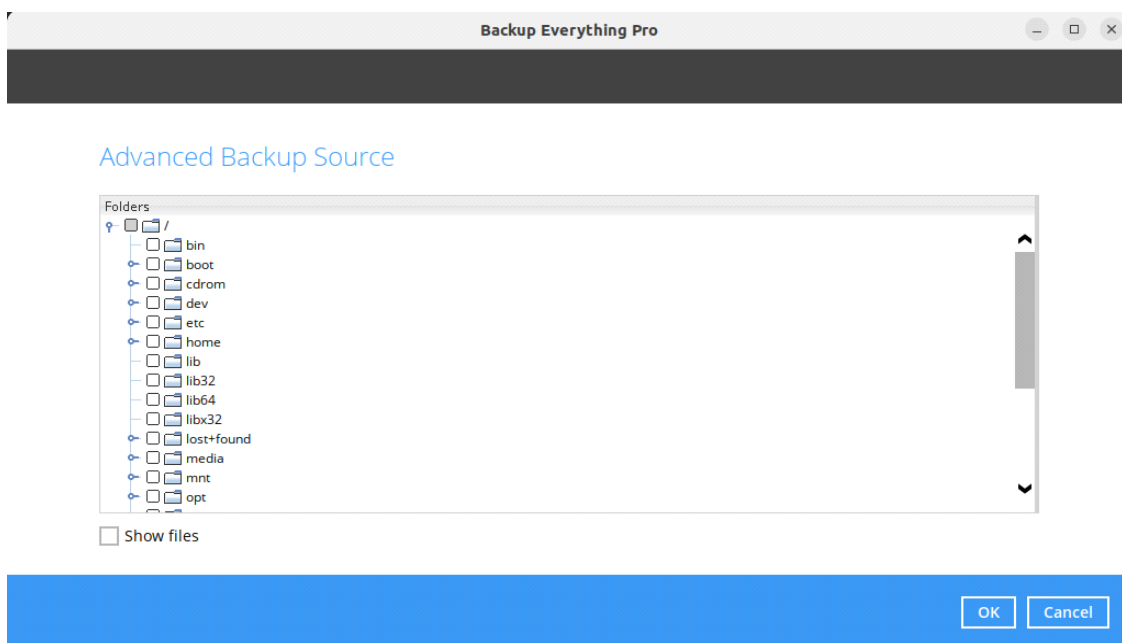


Click OK, Then Click Next to proceed.

Step 5: Configure Backup Schedule

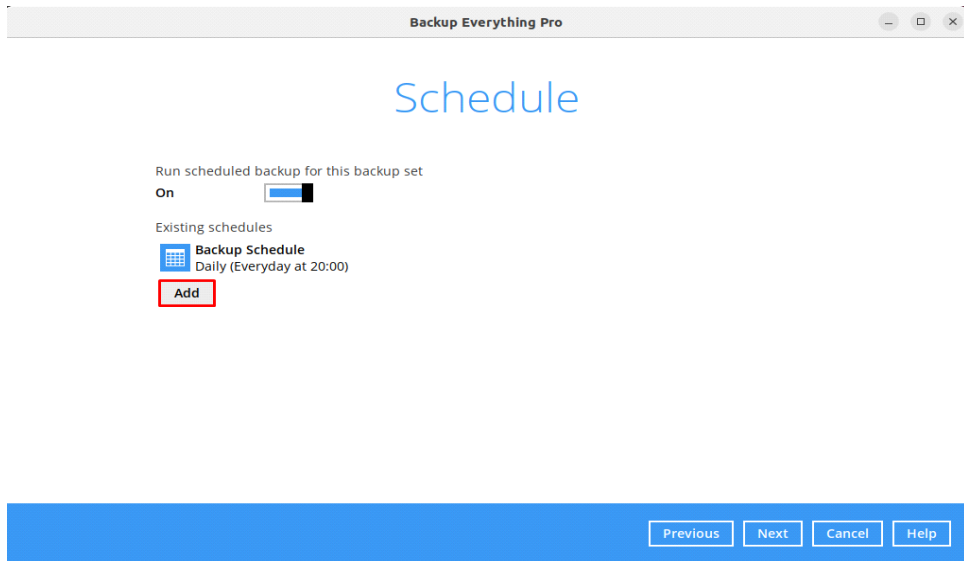

Use the default schedule or set up a new one.

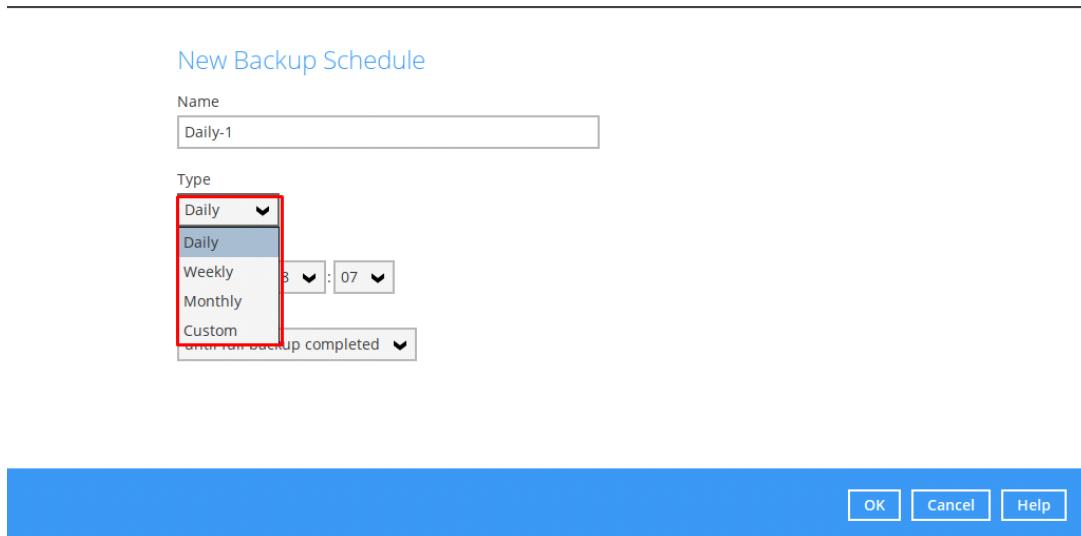

Click OK.

Step 6: Select Backup Destination

Choose where to store the backup:

Backup Everything Pro

Destination

Backup mode
Sequential

Existing storage destinations
+ Add new storage destination / destination pool

Previous Next Cancel Help

New Storage Destination / Destination Pool

Name
UK Storage

Destination storage
UK Storage (Immutable: No)
UK Storage (Immutable: No)
Local / Mapped Drive / Removable Drive

OK Cancel Help


Cloud Storage (UK storage) or Local Drive (External Hard Drive, USB, or another partition)

Click OK.

Step 7: Finalizing the Backup Set

The system will confirm that the Backup Set is created.

A message will appear: "Congratulations! Backup Set Created."

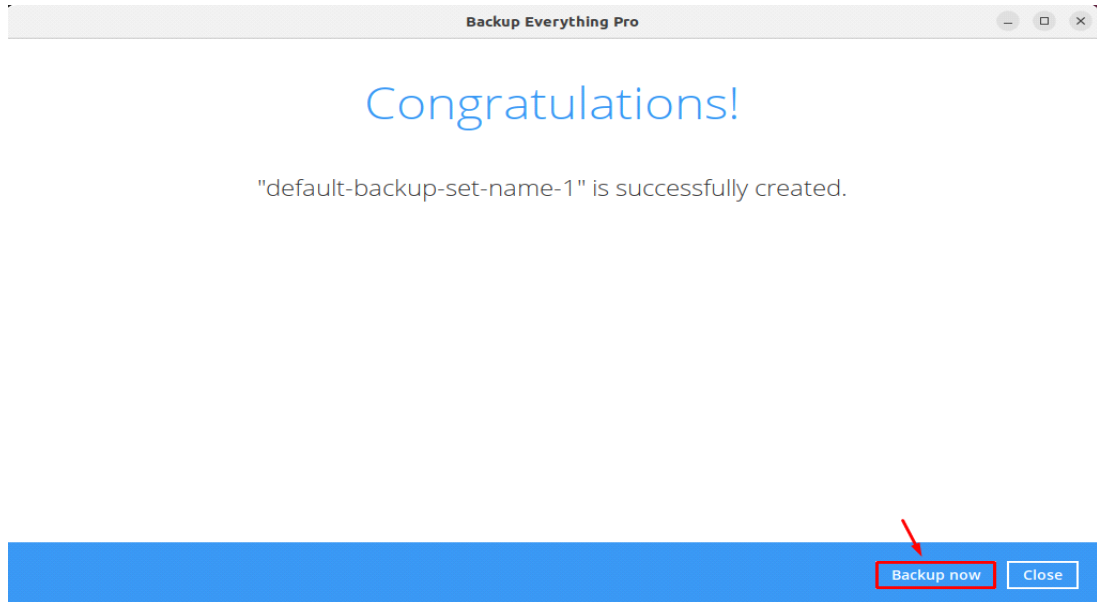


Below this message, you'll find a "Backup" button that allows you to start the backup immediately.

Step 8: Running a Backup


Option 1: Immediate Backup

If you click "Backup" after creating the set, it will start immediately.

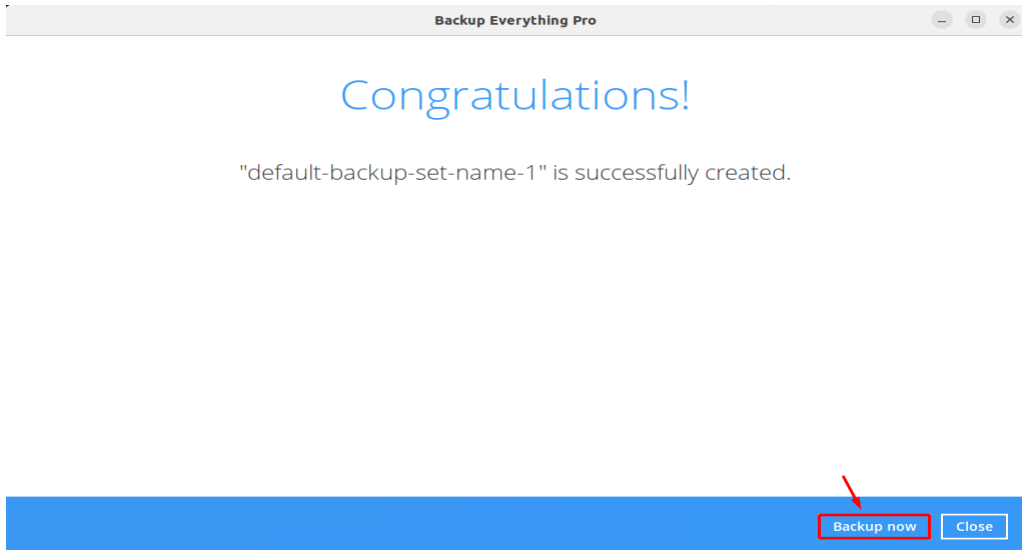

Option 2: Backup from the "Backup" Menu


Go to the Backup section.

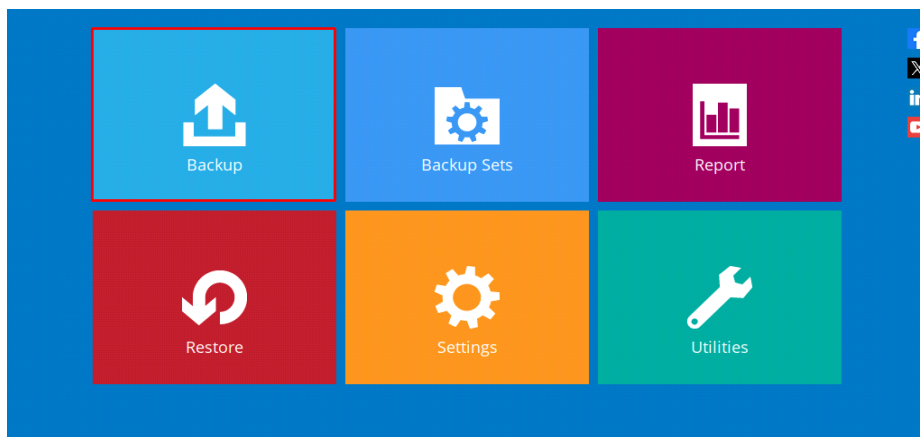

Select an existing Backup Set.

Please Select The Backup Set To Backup


Sort by
Creation Time

	default-backup-set-name-1 Owner: ss-virtual-machine Last Backup: Saturday, 22 March 2025 22:56
---	---

[Close](#) [Help](#)

Click Backup to start the process.

Choose Your Backup Options

 **default-backup-set-name-1**

Backup set type
File

Destinations
 UK Storage (Immutable: No)

Migrate Data
 Migrate existing data to latest version

[Previous](#) [Backup](#) [Cancel](#) [Help](#)

Step 9: Verify the Backup

1. Check the backup destination (cloud storage or local directory) to ensure the files were successfully backed up.
2. Test the backup by restoring a file from the backup set to ensure data is correctly backed up and can be restored.

Conclusion

You have now successfully set up on your Linux machine and created a file backup set. This guide ensures that all necessary steps are covered from creating an account, installing the client, and performing a file backup. Feel free to reach out if further assistance is needed.